

How to add TRT's New Frequencies to DFH Digital V2 Receiver


1. Press "Menu" and go down to "Installation" and press "OK".




2. Press "OK" on "TP Configuration"




3. Using your right arrow button highlight the "Add" option with orange color. When it is highlighted Press "OK".

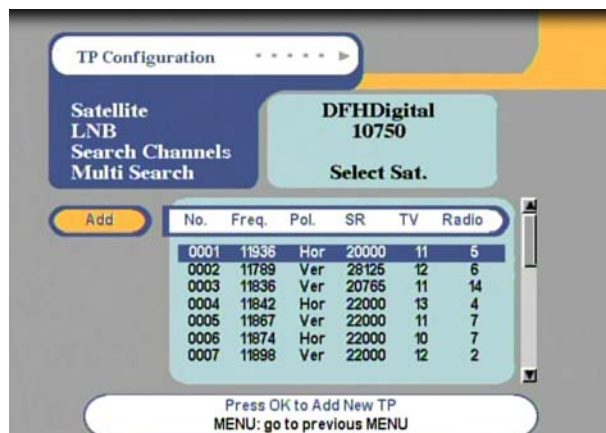


- Enter the information shown below (**Frequency: 11960**, **Polarization: Ver**, **Symbol Rate: 22000**) by using your remote control's numbers and right-left arrows. When done Press "Menu" button to get out of this screen.

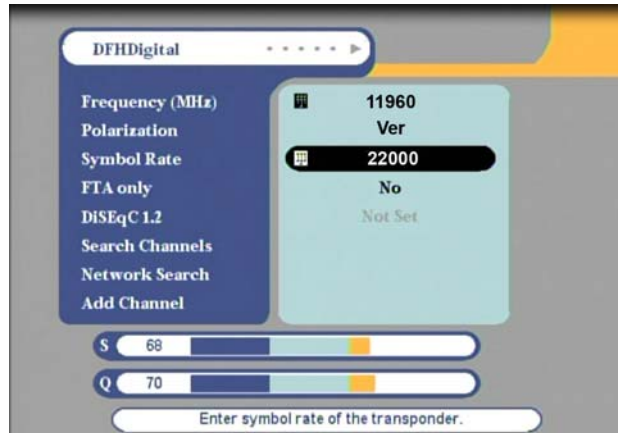

- Go down to "Search Channels" and Press "OK" to start the channel scan.

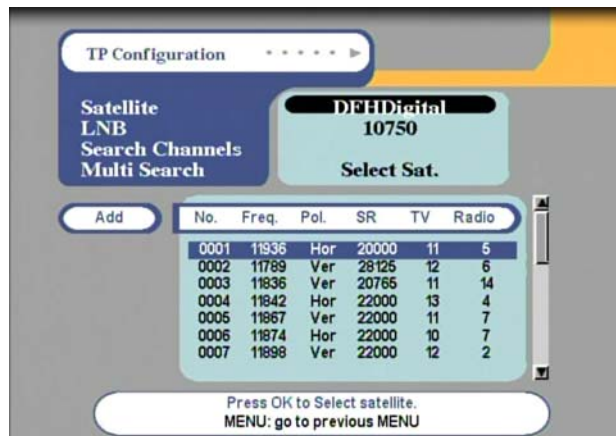

- Press any key to exit when the channel scan is finished.

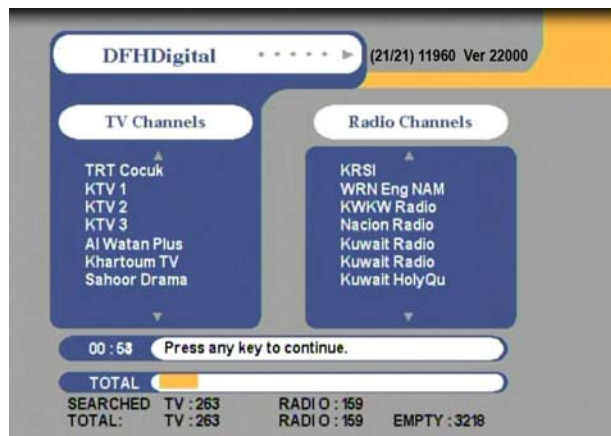

- TRT Channels will appear in different channel numbers. You will need to find the TRT channels in your channel list.