


How to add TRT's New Frequencies to DFH Digital V3 Receiver

1. Press "Menu" then Press "OK" on "Installation"



2. Enter "1234" when asked for password

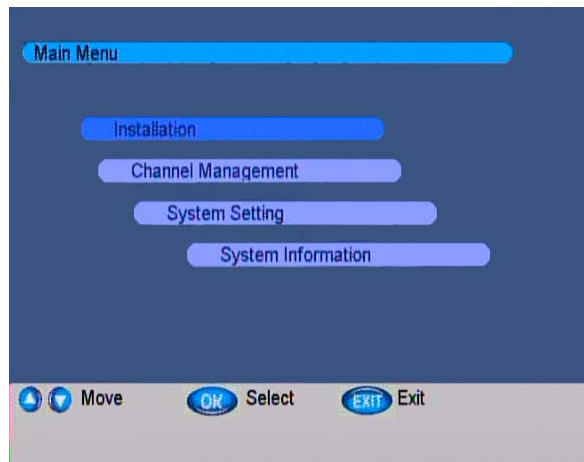

3. Go down to "Manual Search" and Press "OK".



4. Press the Yellow button on your remote control to “Add a new TP”.




5. Move the “Red Dot” to Frequency and type “11960” and then move to Symbol Rate and type “22000” for Symbol Rate. Change the polarization to “V” by using your remote control’s right arrow button.



6. When you enter the information and get the green signal bars at the bottom of the screen Press “OK” to scan channels.



- The system will then search for the channels on the added TP. When done Press “Exit” button to go to channel list.

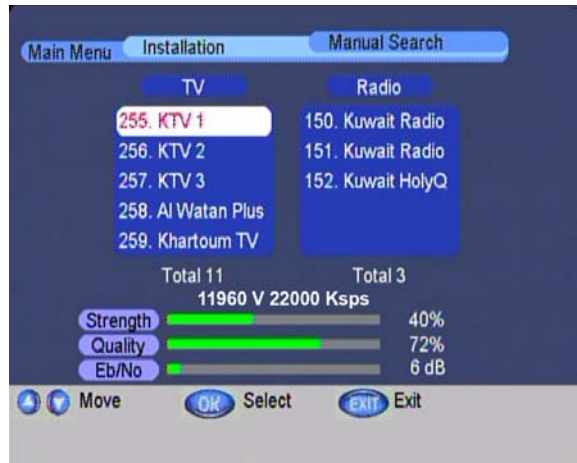

- TRT Channels will appear in different channel numbers. You will need to find the TRT channels in your channel list.