



How to add TRT's New Frequencies to Samsung DSR 2700


1. Press "Menu"

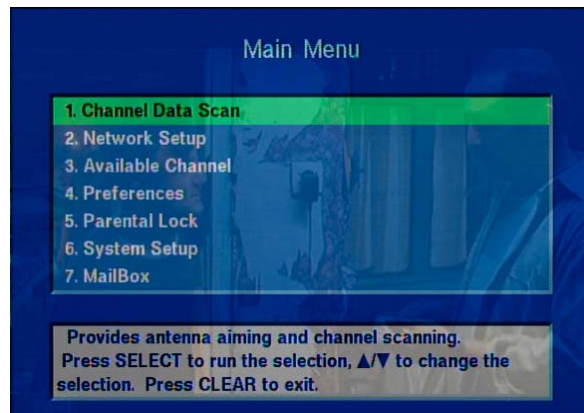


2. Press "Select" on "Network Setup"

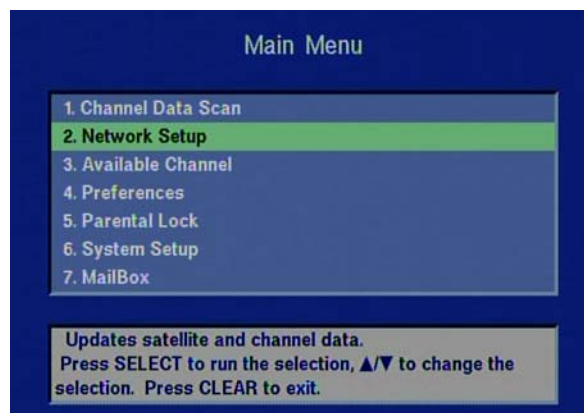


3. Enter "0000" for Pin Code

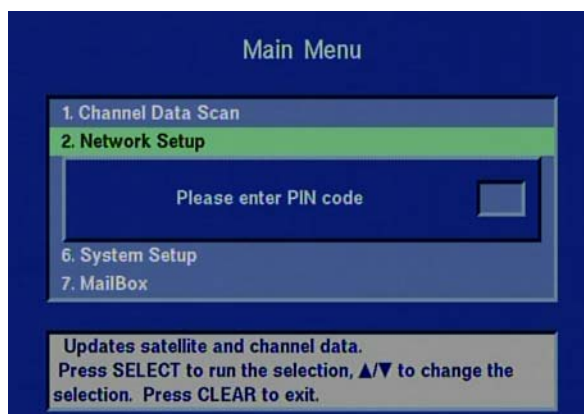


4. Move the white highlight from “Satellite” to “Channel”

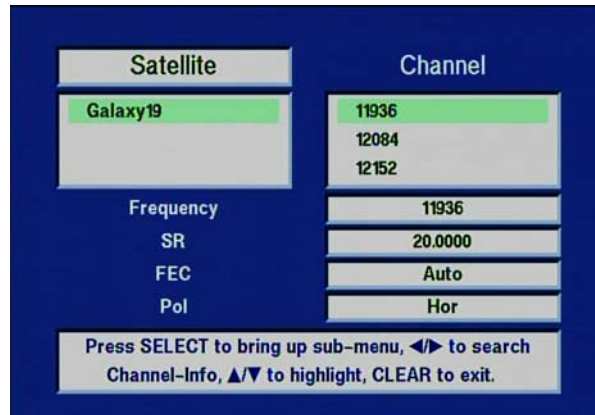


5. Go down and Press “Select” on 12146 and Press “Select” on "Edit Name”.

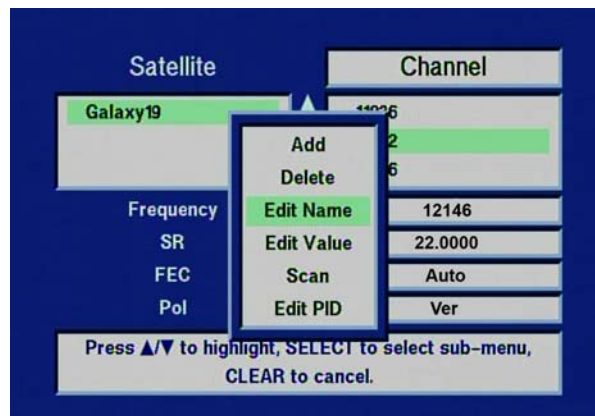


6. Using your remote control’s up & down arrows, Change “12146” to “11960”. Press “Select” when you are done.

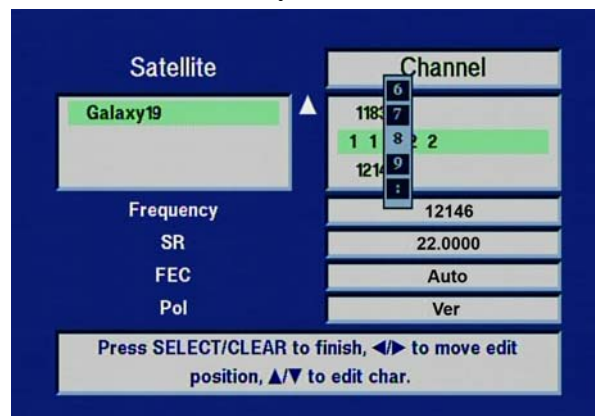


7. Press “Select” on “**11960**” and then Press “Select” on “Edit Value”. You will need to use up and down buttons to move in between the lines and you can use numbers to type. You will need to change “12146” to “**11960**” and Press “Select” when you are done.

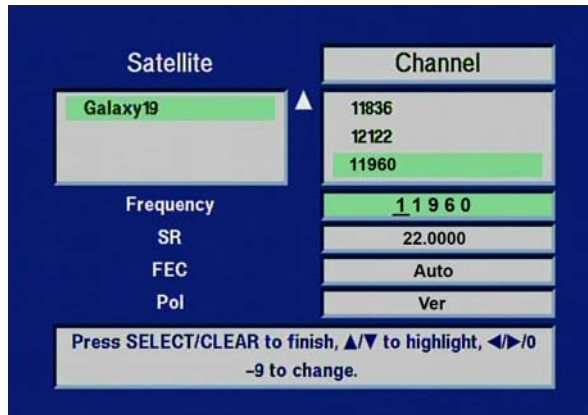


8. Press “Clear” to exit this screen and then Press “Select” on “Yes” when you see the below screen.

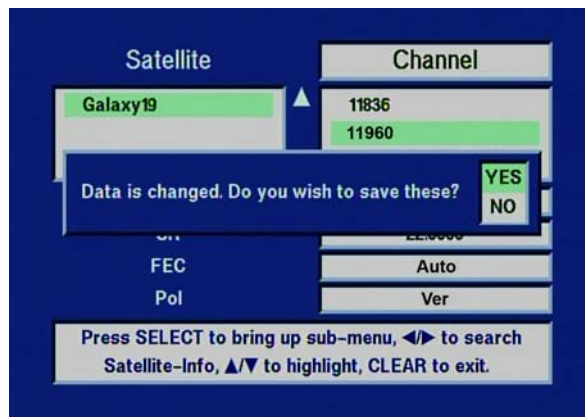


9. Press “Select” on “Channel Data Scan”

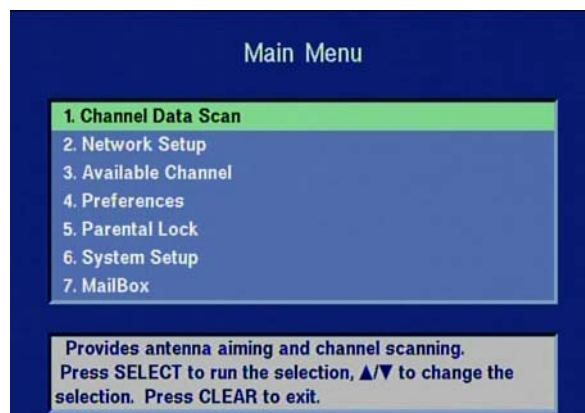

10. Move the green highlight to “Scan & Add”.

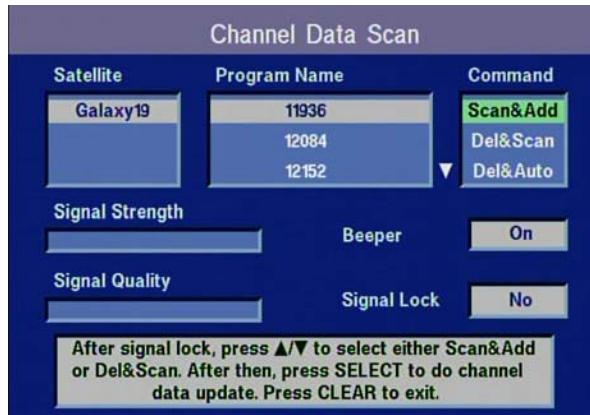


11. Then move the green highlight to “Del & Auto” and Press “Select”.

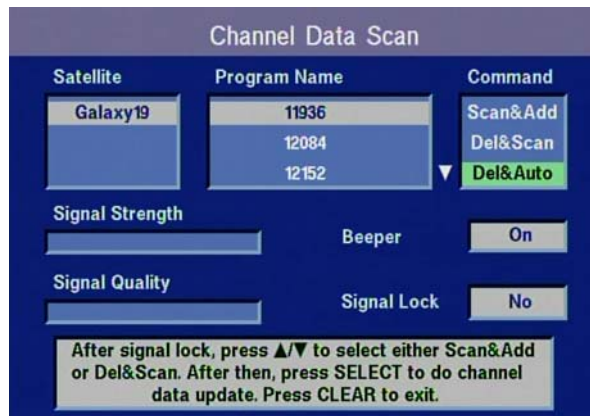


12. Press “Select” on “Yes” when you see the message below.



13. The system will start to scan the channels. Please wait until it finishes.

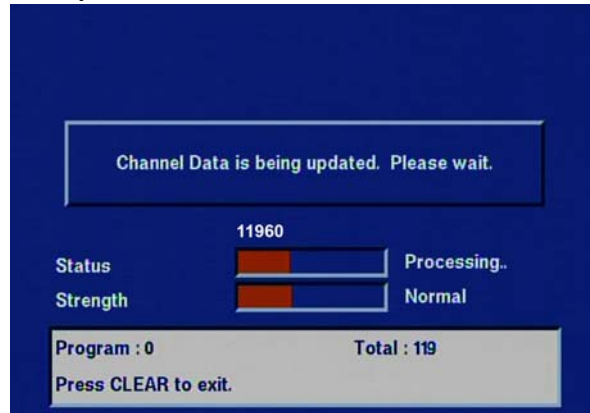

14. When the previous screen comes to your TV Press “Clear” to get out.

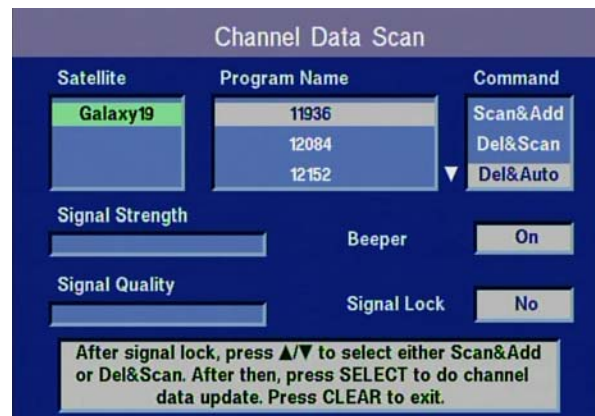

15. TRT Channels will appear in different channel numbers. You will need to find the TRT channels in your channel list.